

02634X Mobile Antenna Installation Instructions

Sedan Mounting


For sedan mounting it is recommended that the antenna be located onto the Benelec Z bracket model 02734. Fit the Z bracket to the vehicle as per instructions.

Loosen the nut and washer from the antenna base and slide them approximately 25mm off the end of the assembly and down the cable.

Insert the cable thru the centre of the Z bracket hole. Position the antenna into the bracket such that the thread locates into the bracket hole. Relocate the washer and nut onto the thread of the antenna assembly (in that order), and tighten the nut.

Route the cable through the vehicle to the appropriate location and fit mating connector to suit the radio. Check the VSWR to ensure that the connector has been fitted correctly.

See page two for alternative mounting arrangements.

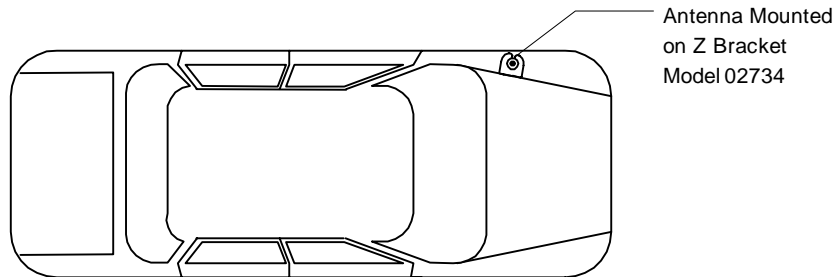

Bull Bar Mounting

For Bull Bar mounting it is recommended that the antenna be located onto the Benelec bracket models 02730, 02731, or 02732.

Fit the bracket to the vehicle as per instructions.

Remove the nut and washer from the antenna base and slide off the end of the cable.

Insert the cable end thru the centre of the bracket hole - feed all the cable through.

Relocate the washer and nut (in that order) over the end of the cable. Position the antenna into the bracket such that the thread locates into the bracket hole.

Slide washer and nut onto the thread below the bracket and tighten the nut. Route the cable through the vehicle to the appropriate location and fit mating connector to suit radio. Check the VSWR to ensure that the connector has been fitted correctly.

